



Plate Transport Assembly

Model QT- 4000 - Model QT- 8000

- Couples plate exposing units to processors for a complete 100% hands free plate transport system
 - Transports plate sizes up to 48 inches
 - Independent input & output speed controls
 - On demand performance
 - Field proven performance
 - Aluminum extruded support frames
 - Locking swivel casters for portability
 - Self contained circuit protection
 - Easy setup - 100% dependable
 - Compact foot print
 - Mar-resistant urethane conveying surfaces
-

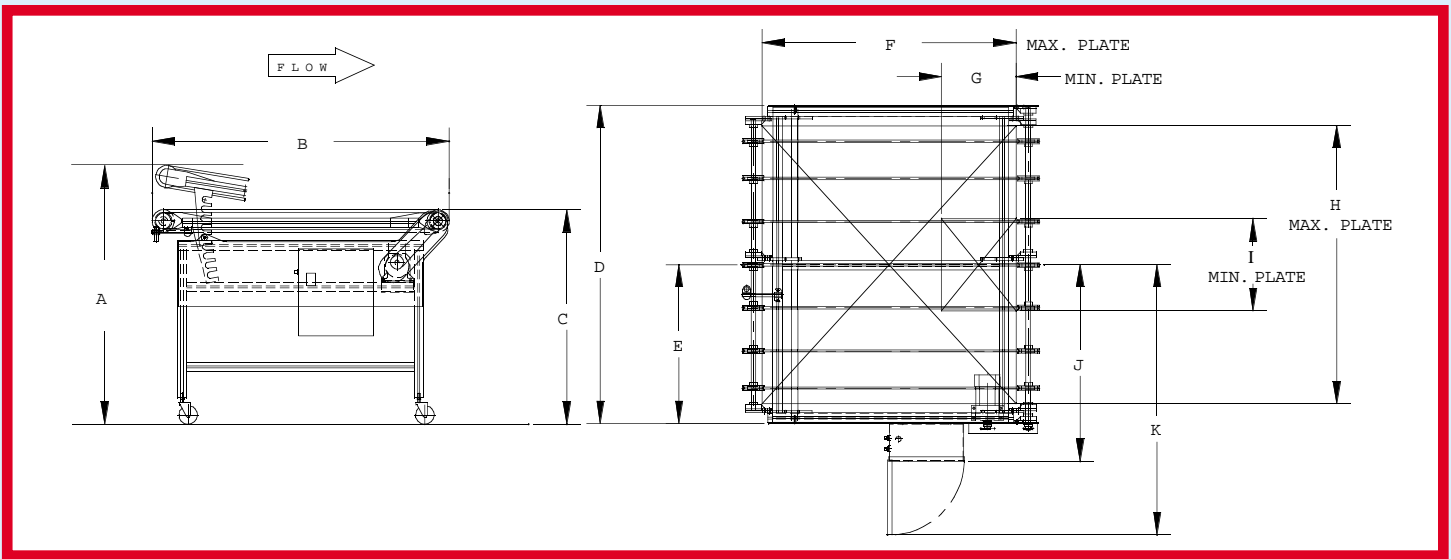


Plate Transport Assembly - Models QT- 4000 / QT- 8000

FEATURES

- On demand operation
- Independent infeed & output speeds
- Height adjustment for various output devices
- Portable for adjacent machine maintenance

SPECIFICATIONS

- 32 1/2" or 48" wide transport units
- Urethane transport belts
- 115V A.C. motor
- Self contained electrical controls
- Product position sensors
- Totally enclosed ABS drive guard
- Incremental in-feed elevations
- Locking swivel casters for portability
- Dual speed control potentiometers
- Adjustable infeed speed (1.0 to 40 F.P.M.)
- Adjustable discharge speed (1.0 to 40 F.P.M.)

	QT-4000	QT-8000
A	41.75"	41.75"
	40.00"	40.00"
	38.25"	38.25"
	36.50"	36.50"
	34.75"	34.75"
B	32.50"	45.00"
C	34.75"	34.75"
D	37.50"	51.50"
E	18.75"	25.75"
F	27.00"	41.00"
G	12.00"	12.00"
H	33.00"	48.00"
I	14.00"	15.00"
J	24.87"	31.87"
K	36.75"	43.75"

Maximum plate size	33" x 27"	45" x 48"
Minimum plate size	14" x 12"	15" x 12"
Unit weight	145 lbs.	175 lbs.
Shipping weight	250 lbs.	350 lbs.

UTILITY REQUIREMENTS

115 VAC 5 AMPS


For Additional Information:

Contact: Alan Cudahy

Phone: 970-547-0005

Fax: 970-547-8352

E-Mail: conveyorsplus@comcast.net

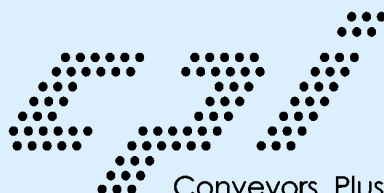

Conveyors Plus, Inc.
13301 Southwest Highway
Orland Park, IL 60462-1364

www.conveyorsplus.com

To order:

Contact: Conveyors Plus, Inc.

Phone: 708-361-1512

Fax: 708-361-4372

E-Mail: contact@conveyorsplus.net